


**DI5009**

DIA3010-ZPKG/US-100-DPS

Evaluation systems, power supplies

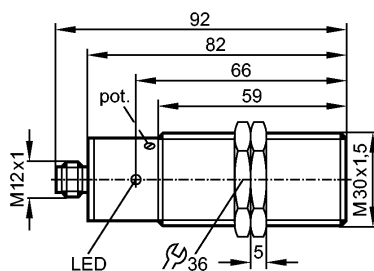

Made in Germany


**Product characteristics**

Compact speed monitor M30

DIA

M30 x 1.5

Connector

Sensing range 10 mm [f]

flush mountable

**Application**

Application	simple evaluation of rotating and linear movement with regard to underspeed; blocking
Switching function	output is switched during the start-up delay and if (f actual) is greater than (f preset)
Electrical design	DC PNP
Switching output	normally open

**Electrical data**

Nominal voltage [V]	10...36 DC
Current consumption [mA]	< 15
Reverse polarity protection	yes

**Outputs**

Transistor	
Current rating (continuous) [mA]	250
Current rating (peak) [mA]	250
Voltage drop [V]	< 2.5
Short-circuit proof	yes
Overload protection	yes

**Range**

Sensing range [mm]	10
Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / Al approx. 0.4 / Cu approx. 0.3

**Measuring / setting range**

Setting range [pulses/min.]	5...300
Adjustment of the switch point	multiturn potentiometer
Hysteresis [% of Sp]	10
Start-up delay [s]	15

**Reaction times**

Damping frequency (max.) [pulses/min]	15000
---------------------------------------	-------

**Environment**

## DI5009

DIA3010-ZPKG/US-100-DPS

Evaluation systems, power supplies

Ambient temperature	[°C]	-25...80
Protection		IP 67

### Safety classification

MTTF	[a]	898
------	-----	-----

### Mechanical data

Mounting		flush mountable
Housing materials		Brass special coating; PBT (Pocan)
Weight	[kg]	0.186


### Displays / operating elements

Input pulses	LED	yellow
Output status indication	LED	green

### Electrical connection

Connection		M12 connector; Gold-plated contacts
------------	--	-------------------------------------

### Wiring



### Remarks

Pack quantity	[piece]	1
---------------	---------	---